

Coil Specification (at 20 °C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 8\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
BSA2-DM3 BSA2-DM5	5	108.7	46	Abt. 0.54	75% Maximum	10% Minimum	130%
	6	85.7	70				
	9	58.1	155				
	12	44.4	270				
	24	21.8	1100				
	48	11.2	4270				

Ordering Information

BSA2 - SS - 2 12 D M 3

IContact Weld Mode : 3:Spot Welding 5:Hinge Match

Contact Form: M:Two form A

Coil Type: D:Standard DC Coil

**Coil Voltage: 03:3V, 05:5V,06:6V,09:9V
12:12V,24:24V,48:48V**

Number of Pole: 2:Two Pole





Type of Sealing: SS:Plastic Sealed Type

Type: BSA2

Classificatio

Model	BSA2
Coil Sensitivity	Standard DC Coil 2A
Flow Solder Type	BSA2 -SS-2□□DM3 BSA2 -SS-2□□DM5

Dimension

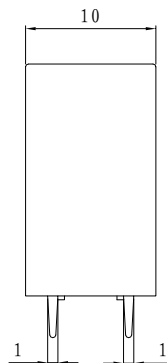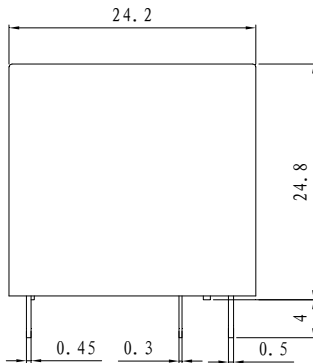

Bottom View

Dimension Tolerance: < 1mm: ± 0.2 mm
1--5mm: ± 0.3 mm
> 5mm: ± 0.5 mm